

APPLICATION OF THE RADON TRANSFORM THEORY
TO ELECTROMAGNETIC INVERSE SCATTERING

Wolfgang-M. Boerner and Yogadhis Das
Department of Electrical Engineering
University of Manitoba
Winnipeg, Manitoba, Canada R3T 2N2

The determination of a target's shape and size from its electromagnetic ramp response signature can be reduced to the geometrical problem of determining a three-dimensional body from its cross-sectional areas. In this paper, the theory of Radon transforms is used to discuss the solution to this problem and to demonstrate that certain aspects of this problem are equivalent to the problem of image reconstruction from projections, which have been solved in various other disciplines. Two of the data inversion algorithms developed to solve the latter problem have been used to determine radar target shapes from their ramp responses.

It is known [1,2] that the cross-sectional area of a target as a function of the distance along the line of sight can be estimated from its backscattered electromagnetic ramp response, which in turn can be approximately synthesized by using a 10:1 frequency bandwidth in the target's low resonance range. Thus the determination of the target shape and size using the ramp response signature is reduced to the geometrical problem of reconstructing a body from its cross-sectional areas. This problem is most naturally tackled by employing the theory of Radon transforms [3,4], because it is known that for the characteristic function, γ of a three-dimensional body, the values of its Radon transform are given by the appropriate cross-sectional areas of the body. Well-known results in the theory of Radon transforms are used to obtain the following results for a three-dimensional body, some of which have been reported previously [5,6].

(1) Let us assume that the cross-sectional areas $A(\eta, \psi, p)$ of a three-dimensional body (Fig. 1a) are known for all directions of viewing (η, ψ) and for all p , the distances from the origin. It is shown that the characteristic function of the body $\gamma(r, \theta, \phi)$ is related to the areas by

$$\gamma(r, \theta, \phi) = - \frac{1}{8\pi^2} \int_0^{2\pi} \int_{-\pi/2}^{\pi/2} \frac{\partial^2 A(\eta, \psi, p)}{\partial p^2} \Big|_{p=r[\cos\theta\cos\eta\cos(\phi-\psi)+\sin\theta\sin\eta]} \cos \eta d\eta d\psi \quad (1)$$

where the notations are explained in Fig. 1.

(2) If only $A(\psi, p)$, the areas corresponding to aspects (ψ) lying on the equatorial plane ($\eta=0$) are known, then the width function $W(x_1, x_2)$ normal to the $x_3=0$ plane is related to $A(\psi, 0)$ as follows

$$A(\psi, p) = \int_{-\infty}^{\infty} \int_{-\infty}^{\infty} W(x_1, x_2) \delta[p - \{x_1 \cos\psi + x_2 \sin\psi\}] dx_1 dx_2 \quad (2)$$

where δ denotes the dirac delta function.
The solution to (2) is

$$W(r_0, \phi) = S_1 - S_2 = -\frac{1}{2\pi^2} \int_0^\pi \int_{-\infty}^\infty \frac{\partial A(\psi, p)}{\partial p} \frac{dp d\psi}{p - r_0 \cos(\psi - \phi)} \quad (3)$$

where $x_1 = r_0 \cos \phi$, $x_2 = r_0 \sin \phi$, $x_3 = S_1(r_0, \phi)$ and $x_3 = S_2(r_0, \phi)$ are respectively the upper and lower surfaces of the body as illustrated in Fig. 1b.

(3) If in addition to $A(\psi, p)$, also the derivatives $\frac{\partial A}{\partial \eta}$ are known at the $\eta=0$ plane, then

$$\beta(r_0, \phi) = \frac{S_1^2 - S_2^2}{2} = \frac{1}{2\pi^2} \int_0^\pi \int_{-\infty}^\infty \frac{\partial A(\eta, \psi, p)}{\partial \eta} \Big|_{\eta=0} \frac{dp d\psi}{p - r_0 \cos(\psi - \phi)} \quad (4)$$

from (3) and (4), one can determine the body through

$$x_3 = S_1 = \frac{W}{2} + \frac{\beta}{W} \quad \text{and} \quad x_3 = S_2 = -\frac{W}{2} + \frac{\beta}{W} \quad (5)$$

where W and β are given by (3) and (4) respectively.

Equations (1) to (5) represent formal analytical solution to the problem of determining different features of a target from its cross-sectional areas. However, the emphasis here is put on equation (2), because it demonstrates the equivalence of the target identification problem to the problem of image reconstruction from a finite number of projections [7,8], which have been solved in many different fields ranging from computerized tomography to radio astronomy. Two of the reconstruction algorithms (e.g. the convolution [9] and the simultaneous iterative reconstruction technique [10] have been applied to solve for W in Eq.(2) using cross-sectional areas, which are either geometrically calculated or derived from synthesized ramp responses. Numerical results for a sphere and a spheroid are discussed [11]. In [11] and [12] it is shown how the transient ramp response method [1,2] is related to the physical optics inverse transform method [13], which was derived from Bojarski's identity [14], via the Radon transform approach of [6].

References

1. E.M. Kennaugh and D.L. Moffatt, "Transient and impulse response approximation," Proc. IEEE, Vol.53, pp.893-901, August 1965.
2. J.D. Young, "Radar imaging from ramp response signatures," IEEE Trans. Antennas and Propagat., Vol.AP-24, pp.276-282, May 1976.
3. D. Ludwig, "The Radon transform on Euclidean space," Commun. Pure Appl. Math., Vol.19, pp.49-81, 1966.
4. I.M. Gel'fand, M.I. Graev, N. Ya. Vilenkim, Generalized Functions, New York: Academic 1966, Vol.5, pp.1-74.
5. Y. Das and W.M. Boerner, "Application of algorithms for 3-D image reconstruction from 2-D projections to E.M. inverse scattering,"

- presented at the October 1975 USNC/URSI Annual Meeting, Boulder, Colorado.
6. Y. Das and W.M. Boerner, "On radar target shape estimation using algorithms for reconstruction from projections," to appear in IEEE Trans. Antennas and Propagat., Vol.AP-26 (2), March 1978 issue.
 7. R. Gordon and G.T. Herman, "Three-dimensional reconstruction from projections: A review of algorithms," Int. Rev. of Cytology, Vol.38, New York: Academic, 1974, pp.111-151.
 8. The special issue on physical and computational aspects of 3-dimensional image reconstruction, IEEE Trans. on Nuclear Science, NS-21(3), June 1974.
 9. L.A. Shepp and B.F. Logan, "The Fourier reconstruction of a head section," in Ref [8], pp.21-43.
 10. T.F. Budinger and G.T. Gullberg, "Three-dimensional reconstruction in nuclear medicine emission imaging," in Ref [8], pp.2-13.
 11. Y. Das, Application of concepts of image reconstruction from projections and Radon transform theory to radar target identification, Ph.D. Thesis, October 1977, Faculty of Graduate Studies, University of Manitoba, Winnipeg, Canada, R3T 2N2.
 12. Y. Das, W.M. Boerner, "An interdisciplinary approach to electromagnetic inverse scattering using Radon transform theory," Proc. 1978 National URSI/USNC Meeting, June 15-19, 1978, Washington, D.C. (Session B, paper No.3, June 15, 1978, PM)
 13. R.M. Lewis, "Physical optics inverse diffraction," IEEE Trans. AP 17 (5), 1969, pp.308-314.
 14. N.W. Bojarski, Three-dimensional electromagnetic inverse scattering, Syracuse Univ. Res. Corp., Syracuse, N.Y., Feb. 1967.

Acknowledgement

The research reported was supported by the National Research Council of Canada under Grant No. A7240.

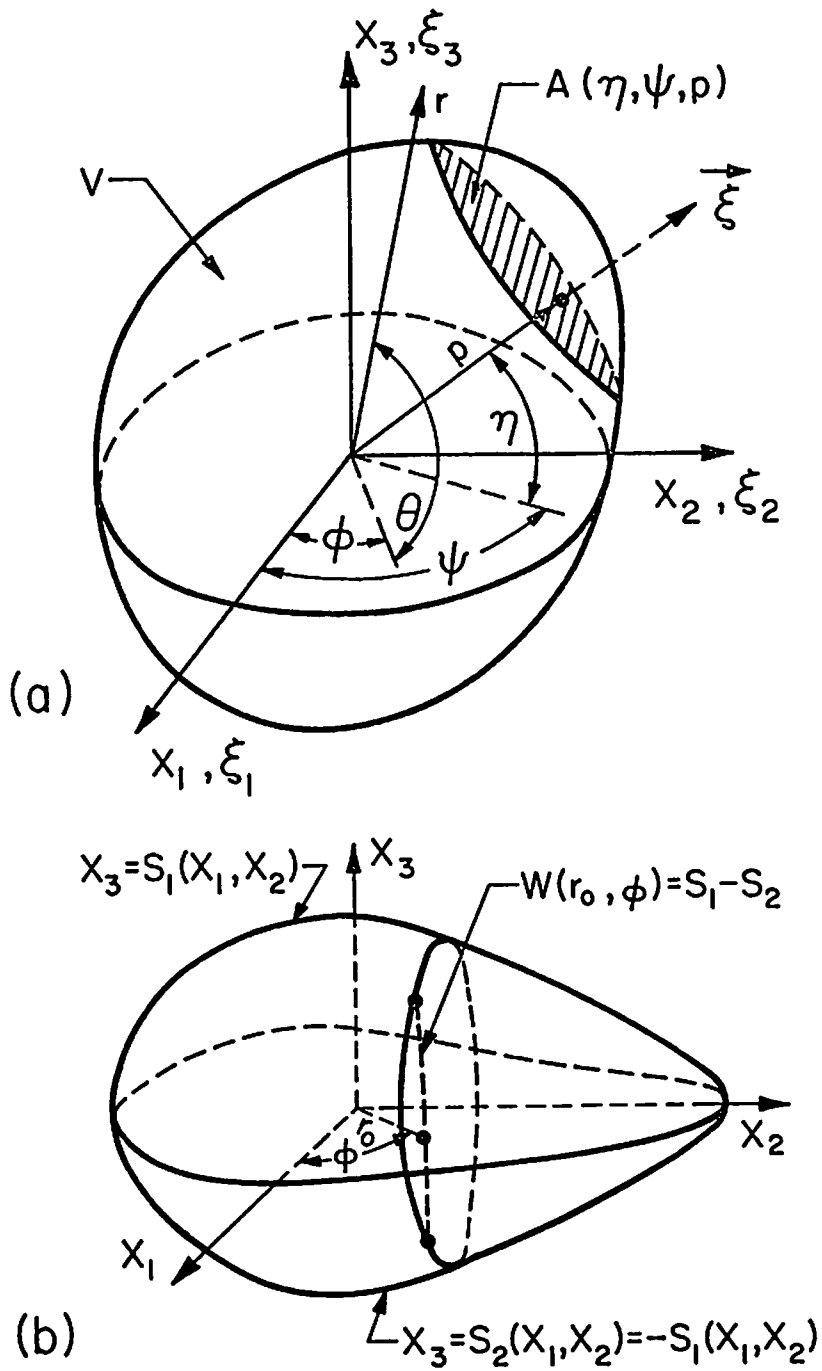


Fig.1 Geometry of the Problem