

Switched Beam Triangular Microstrip Antenna Fed by Hybrid Coupler

Indra Surjati, Yuli KN and Awan Septianggono
 Post Graduate Program Electrical Engineering
 Faculty of Industrial Technology Trisakti University, Indonesia
indra@trisakti.ac.id and indra_surjati@yahoo.com

1. Introduction

Recently, switched beam antenna system has been widely used in numerous applications such as in communication system, satellite system and modern multifunction radar. This is because of the ability of the switched beam antenna to reduce the existing interference and to improve the quality of transmission [1][2][3]. A switched beam system consists of a beams witching network and antenna array. A simple design of beam switching uses a 3 dB hybrid coupler. The 3 dB hybrid coupler is a directional coupler with a 90° phase difference in the output of the through and coupled arms [4]. In general the quadrature hybrid is one of the most popular passive circuits used for microwave and millimeter wave applications [5]. It is an important circuit element in microwave integrated circuits and can be used as a power divider, combiner or a part of mixer.

A microstrip patch antenna allowing switching between LHCP and RHCP is proposed [6]. It consists of a square radiating patch and a 3 dB hybrid coupler using single-polar-double-throw (SPDT) switch. In the literature [7] proposed a dual fed circular polarized rectangular patch microstrip antenna using 3 dB hybrid coupler. Other technique is presented by [3], using rectangular patch antenna fed by 3 dB hybrid coupler non linier impedance at the series arm.

Therefore this paper proposed a simple configuration using triangular patch microstrip antenna fed by symmetrical 3 dB quadrature hybrid coupler. The triangular patch antenna is chosen because it has the advantage of occupying less metalized area on substrate than other existing configurations.

2. Antenna Design

The proposed antenna is realized on one layer substrate with a relative permittivity (ϵ_r) = 4.3, substrate of thickness (h) = 1.6 mm and loss tangent ($\tan\delta$) = 0.09. The dimension of the side length of the triangular patch antenna a is given by :

$$a_{eff} = \frac{2c}{3f_o\sqrt{\epsilon_r}} + h(\epsilon_r)^{-0.5} \quad (1)$$

Figure 1 shows the simple structure of 3 dB hybrid coupler. This component is symmetrical and has the following properties: if port 1 (P1) is fed, then the signal travels to port 4 (P4) and port 3 (P3) is consequently coupled, while port 2 (P2) is isolated. If port 2 (P2) is fed, then the signal travels to port 3 (P3) and port 4 (P4) is consequently coupled, while port 1 (P1) is isolated. If the quadrature hybrid coupler is feed with the impedance input Z_0 , the impedance of the shunt arm is Z_0 and the impedance of the series arm is $Z_0\sqrt{2}$, while the maximum of the arm length is $\lambda/4$.

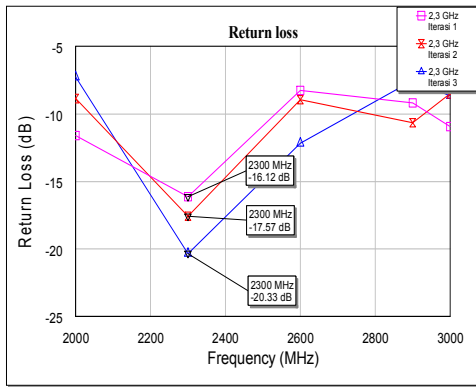


Figure 3a Changes feed line against return loss

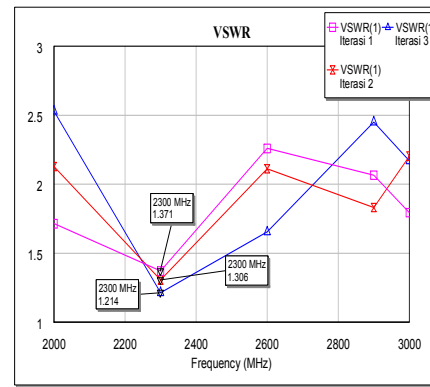


Figure 3b Changes feed line against VSWR

Table 1 Return loss and VSWR value after adjusting the feed line

Length of the feed line			Frequency 2,3 GHz	
A	C	D	RL	VSWR
9 mm	9 mm	24 mm	-16.127 dB	1,3702
12 mm	12 mm	27 mm	-17.404 dB	1.3117
17 mm	18 mm	35 mm	-19.972 dB	1.223

The next step is to adjusting the length of the feed line at the B position as seen in the Figure 4a and 4b and the value of the return loss and VSWR can be seen in Table 2.

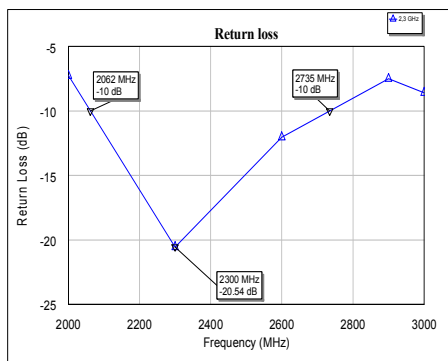


Figure 4a Feed line at B against return loss

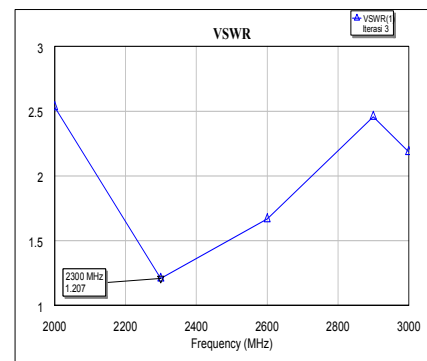


Figure 4b Feed line at B against VSWR

Table 2 Return loss and VSWR value after adjusting the feed line at B position

Length of the feed line at B	Frequency 2,3 GHz	
	RL	VSWR
21 mm	-20.17 dB	1.218
22 mm	-20.24 dB	1.216
23 mm	-20.54 dB	1.207

The impedance bandwidth range is from 2.062 GHz up to 2.735 GHz or 673 MHz and it is about 29.22% as seen at Figure 4a. Figure 5a shows the radiation pattern when port 1 is on and Figure 5b when port 2 is on.

Figure 6a and 6b shown that the proposed antenna has broadside radiation pattern with 34° Half Power Beamwidth (HPBW) both for port 1 and port 2.

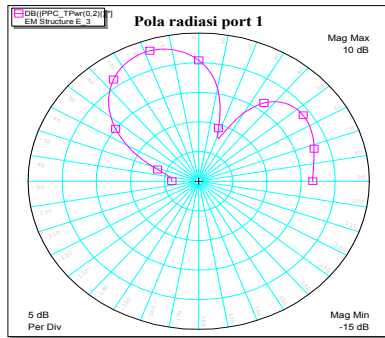


Figure 5a Radiation pattern when port 1 is on

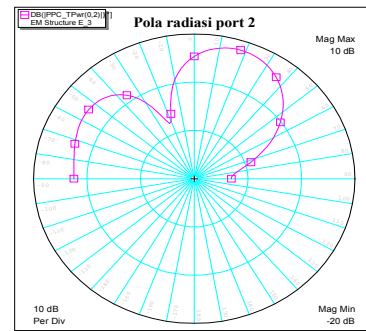


Figure 5b Radiation pattern when port 2 is on

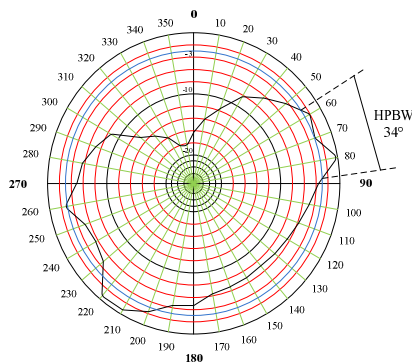


Figure 6a Radiation pattern at port 1 with HPBW 34°

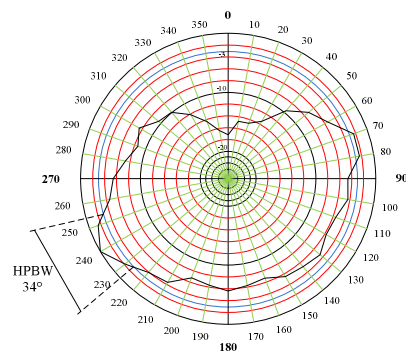


Figure 6b Radiation pattern at port 2 with HPBW 34°

4. Conclusion

A configuration of triangular microstrip antenna using hybrid coupler feed line has been proposed in this paper. Return loss of -20.54 dB and VSWR 1.207 can be achieved by controlling the feed line and the dimension of patch antenna. The antenna has an impedance bandwidth of 673 MHz or about 29.22% and have broadside radiation pattern with HPBW for the two port is 34° . Therefore, the proposed antenna is applicable as a new candidate to work at 2.3 GHz for WiMAX application.

References

- [1] T.A. Denidni, and T.E. Libar, "Wide Band Four Port Butler Matrix for Switched Multibeam Antenna Array", Proc. Personal, Indoor, and Mobile Radio Communication (PIMRC '03), doi:10.1109/PIMRC.2003.1259161.
- [2] E. Siachalou, E. Vafiadis, S.S. Goudos, T. Samaras, C.S. Koukourlis, and S. Panas, "On The Design of Switched Beam Wideband Base Station", IEEE Antennas and Propagation Magazine, Vol. 46, No.1, doi: 10.1109/MAP.2004.1296180.
- [3] Yuli K Ningsih, M. Asvial and Eko T. Rahardjo, "Wideband Non Linear 3 dB Hybrid Coupler for X-Band Switched Beam Antenna", Journal of Telecommunications, Vol.4, Issue2, September 2010.
- [4] D.M. Pozar, "Microwave Engineering", John Wiley & Sons, 2nd ed. New York, 1998.
- [5] K.K. M. Cheng and F.L. Wong, "A novel approach to the design and implementation of dual-band compact planar 90 branch-line coupler," IEEE Trans. Microw. Theory Tech., Vol. 52, No. 11, November 2004.
- [6] W. B. Wei, Q. Z. Liu, Y. Z. Yin, and H. J. Zhou, "Reconfigurable Microstrip Patch Antenna With Switchable Polarization", Progress in Electromagnetics Research, PIER 75, 63-68, 2007.
- [7] Zuraidah BT Harith, "Design Of A Circular Polarization Microstrip Antenna At 2.4 GHz", Thesis, Universiti Teknologi Malaysia, November 2005.