

**BACKWARD-WAVE DIRECTIONAL COUPLER WITH TIGHT COUPLING AND BROAD BANDWIDTH USING ONE-DIMENSIONAL MUSHROOM STRUCTURE**

Jae-Gon Lee and Jeong-Hae Lee

Dept. of Radio Science and Communication Engineering, Hongik University, Seoul, 121-791, Korea

E-mail: [jeonglee@hongik.ac.kr](mailto:jeonglee@hongik.ac.kr)

**1. Introduction**

Since double negative (DNG) materials were investigated theoretically [1] and experimentally [2] by V. G. Veselago and UCSD group, respectively, DNG materials have been researched by many groups. The analysis of physical phenomenon of DNG structure consisted of split ring resonators (SRRs) and periodic thin wire has been investigated intensively by many research groups [3-4]. However, this DNG structure has the disadvantage of narrow bandwidth to be utilized for practical RF devices. On the other hand, artificial transmission line composed of series capacitance and shunt inductance has been investigated to design the broadband RF devices [5-7]. For instance, backward-wave directional couplers having the characteristics of tight coupling and broad bandwidth were suggested to overcome the disadvantages of conventional coupler by University of Toronto group [8] and UCLA group [9], respectively. They have realized DNG transmission line by lumped elements and inter-digital capacitor and inductive stub.

The mushroom structure, proposed for high impedance surfaces as a reflector (e. g. low profile antenna) by D. Sievenpiper *et al.* in 1999 [10], can also be utilized for DNG transmission line [11]. The DNG characteristics of mushroom structure are induced by series capacitance by gap and shunt inductance by grounded wire. In this paper, we have proposed a new type of backward-wave directional coupler that has the characteristics of tight coupling and broad bandwidth using one-dimensional mushroom structure. The designed directional coupler consists of conventional microstrip line and one-dimensional mushroom as DNG transmission line.

**2. One-dimensional mushroom structure as DNG transmission line**

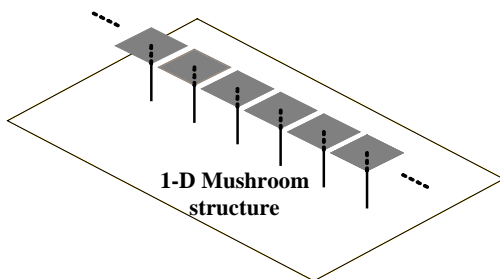


Figure 1. One-dimensional mushroom structure

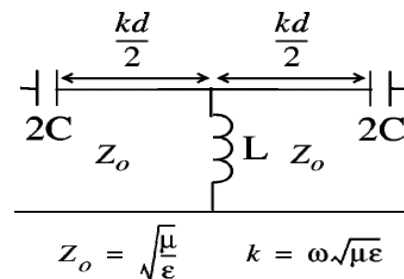


Figure 2. Equivalent circuit model of 1-D mushroom structures

One-dimensional mushroom structure is composed of a patch separated by gap and a grounded wire, as depicted in Fig. 1. This mushroom structure can be implemented by microstrip line with gap and via hole. Fig. 2 shows an equivalent circuit model of one-dimensional mushroom structure. Series capacitance and shunt inductance are induced by gap and grounded wire, respectively. Denoted  $k$ ,  $d$ , and  $Z_0$  are the propagation constant of the interconnecting transmission lines, the unit-cell dimension, and characteristic impedance of host transmission line, respectively. We have simulated 10-unit cell one-dimensional mushroom structure using commercial software (Ansoft's HFSS) to obtain dispersion diagram. Length of gap and diameter of wire are 0.05mm and 0.3mm, respectively. Patch size of designed mushroom structure is 10mm×10mm. The utilized substrate is RT/Duroid 5880 with a relative dielectric constant  $\epsilon_r$  of 2.2 and a thickness  $h$  of 1.57mm. As shown in Fig. 3, DNG region is between 2.4 and 4GHz and  $\beta_{DNG}$  is  $-124 \text{ (m}^{-1}\text{)}$  at 3GHz.

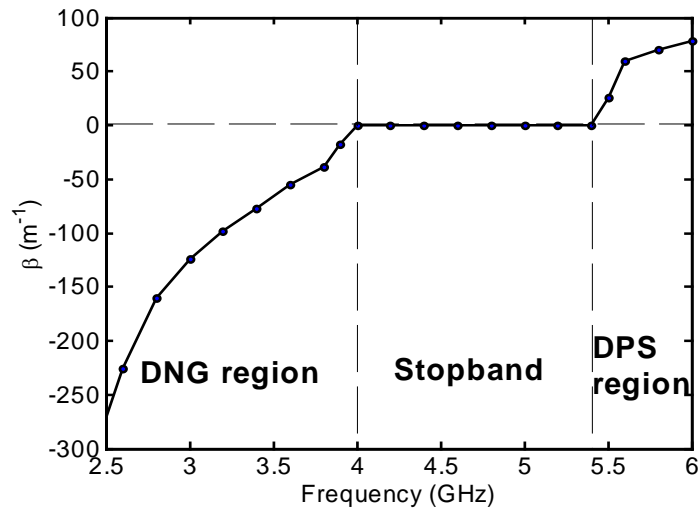


Figure 3. Full-wave simulated dispersion diagram of 1-D mushroom structure (Number of unit-cell=10, length of gap=0.05mm, diameter of wire=0.3mm, patch size=10mm×10mm, and dielectric constant and thickness of substrate=2.2 and 1.57mm, respectively)

### 3. Backward-wave directional coupler with tight coupling and broad bandwidth

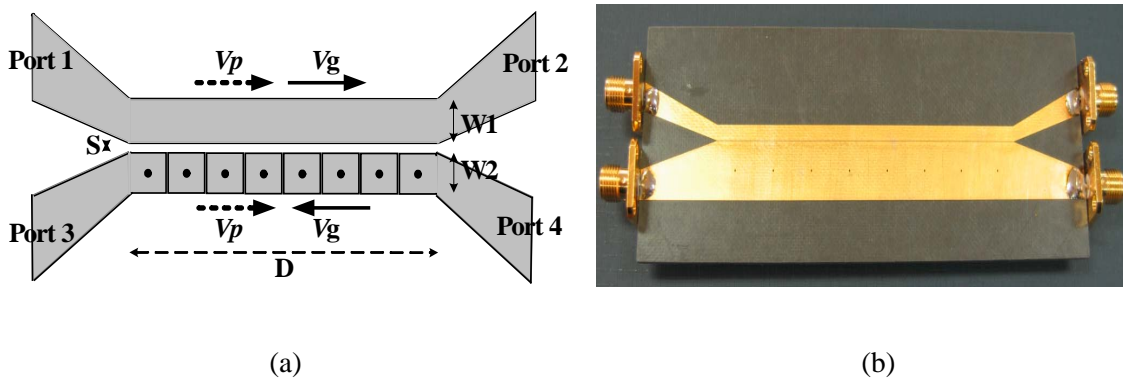


Figure 4. The proposed directional coupler (a) Structure (b) Fabricated photograph

A structure of one-dimensional mushroom directional coupler for tight coupling and broad bandwidth is conceptually displayed in Fig. 4(a). The fabricated one-dimensional mushroom directional coupler is also shown in Fig. 4(b). If power is injected at port1, phase (propagation constant) and group (pointing vector) velocity direct toward port2. Because coupling between two lines occurs through transverse evanescent waves to same direction of phase velocity, phase and group velocity of the other coupled line propagate toward port4 and port3, respectively, due to the DNG property of the mushroom structure. As a result, backward coupling is accomplished in this type of directional coupler. In a case of conventional asymmetric coupler, maximum forward coupling is obtained when length of coupler (D) is satisfied with  $\pi/|\beta_c - \beta_\pi|$ .  $\beta_c$  and  $\beta_\pi$  are the propagation constants for the c and  $\pi$  modes, respectively [12]. In the case of very weak coupling between the two lines,  $\beta_c$  and  $\beta_\pi$  conceptually can be changed to  $\beta_{MS}$  (propagation constant of microstrip) and  $\beta_{DNG}$  (propagation constant of mushroom structure), respectively [9]. Therefore, maximum backward coupling occurs when D is  $\pi/|\beta_{MS} + \beta_{DNG}|$  ( $\beta_{DNG}$  is negative sign in DNG region). We expect that D for maximum backward coupling of mixed microstrip and one-dimensional mushroom structure coupler is smaller than that for maximum forward coupling of conventional asymmetric coupler. In other words, new type of coupler has a property of tight coupling compared with conventional forward-wave coupler.

In this paper, we have designed backward-wave directional coupler using the one-dimensional mushroom structure mentioned in the section2. The  $\beta_{DNG}$  and  $\beta_{MS}$  are  $-124 \text{ (m}^{-1}\text{)}$  and  $84.5 \text{ (m}^{-1}\text{)}$  at 3GHz, respectively. As considered condition of maximum backward coupling, a length of coupler (D) is obtained to 80mm (needs to 8-unitcell mushroom structure in the coupled line). And then, separation between microstrip and one-dimensional mushroom (S) is selected as 0.1mm.

The S-parameters of the coupler, which are obtained by simulation and measurement using Ansoft's HFSS and HP 8510C Vector Network Analyzer, are presented in Fig. 5(a) and Fig. 5(b). As shown in Fig. 5(a) and 5(b), measured results show good agreement with simulated results. Despite of a relative

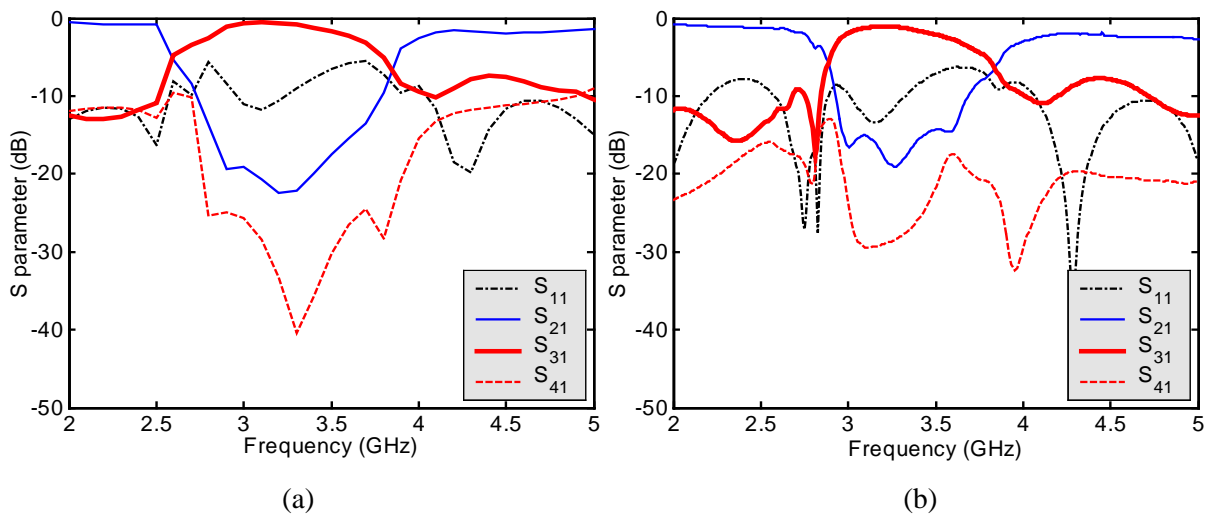


Figure 5. S-parameters of the designed directional coupler (a) Full-wave simulation (b) Measurement (Operation frequency=3GHz, number of unit-cell=8, S=0.1mm, D=80mm, W1=2.655mm, and patch size (W2)=10mm×10mm)

wide separation between two lines, coupling coefficient of proposed coupler is achieved to be around  $-1\text{dB}$  from 2.9 to 3.7GHz. Isolation is below  $-25\text{dB}$  in a coupling range.

#### 4. Conclusion

A new type of backward-wave directional coupler with tight coupling and broad bandwidth composed of conventional microstrip and one-dimensional mushroom structure characterized with DNG transmission line has been proposed. Tight coupling is broadly achieved to be about  $-1\text{dB}$  near operation frequency (bandwidth of 30%). Moreover, high directivity of  $\sim 30\text{dB}$  has been obtained in the coupling frequency range.

#### References

- [1] V. G. Veselago, "The electrodynamics of substances with simultaneously negative values of permittivity and permeability," *Soviet Physics Uspekhi*, Vol. 10, No. 4, pp.509-514, 1968.
- [2] D. R. Smith, Willie J. Padilla, D. C. Vier, S. C. Nemat-Nasser, and S. Schultz, "Composite medium with simultaneously negative permittivity and permeability," *Physical Review Letters*, Vol. 84, No. 18, pp. 4184-4187, 2000.
- [3] R. A. Shelby, D. R. Smith, S. C. Nemat-Nasser, and S. Schultz, "Microwave transmission through a two-dimensional, isotropic, left-handed metamaterial," *Applied Physics Letters*, Vol. 78, No. 4, pp.489-491, 2002.
- [4] P. Markos and C. M. Soukoulis, "Numerical studies of left-handed materials and arrays of split ring resonators," *Physical Review E*, Vol. 65, 2002.
- [5] G. V. Eleftheriades, A. K. Iyer, and P. C. Kremer, "Planar negative refractive index media using periodically L-C loaded transmission lines," *IEEE Trans. on MTT*, Vol. 50, No. 12, 2002.
- [6] Lei Liu, C. Caloz, and T. Itoh, "Dominant mode leaky-wave antenna with backfire-to-endfire scanning capability," *Electronics Letters*, Vol. 38, No. 23, 2002.
- [7] A. Grbic and G. V. Eleftheriades, "Experimental verification of backward-wave radiation from a negative refractive index metamaterial," *Journal of Applied Physics*, Vol. 92, No. 10, 2002.
- [8] R. Islam, F. Elek, and G. V. Eleftheriades, "Coupled-line metamaterial coupler having co-directional phase but contra-directional power flow," *Electronics Letters*, Vol. 40, No. 5, 2004.
- [9] C. Caloz and T. Itoh, "A novel mixed conventional microstrip and composite right/left-handed backward-wave directional coupler with broadband and tight coupling characteristics," *IEEE Microwave and wireless components letters*, Vol. 14, No. 1, 2004.
- [10] D. Sievenpiper, L. Zhang, R. F. J. Broas, N. G. Alexopolous, and E. Yablonovitch, "High-impedance electromagnetic surfaces with a forbidden frequency band," *IEEE Trans. on MTT*, Vol. 47, 1999.
- [11] A. Sanada, C. Caloz, and T. Itoh, "Planar distributed structures with negative refractive index," *IEEE Trans. on MTT*, Vol. 52, No. 4, 2004.
- [12] R. Mongia, I. Bahl, and P. Bhartia, *RF and Microwave coupled-line circuits*. Norwood, MA: Artech House, 1999.