

Design X-Circular Polarized with Slanted Rectangular Slot by using Single Port

M.Z.A. Abd. Aziz¹, N.A.D.A.Mufit¹, M.K. Suaidi¹, M.K.A.Rahim², M.R. Kamaruddin²

¹Faculty of Electronic & Computer Engineering

Universiti Teknikal Malaysia Melaka (UTeM), Melaka, Malaysia

mohamadzoinol@utem.edu.my, nuralyaa_diyana@yahoo.com

²Faculty of Electrical Engineering, Universiti Teknologi Malaysia (UTM)

Skudai, Johor, Malaysia

Abstract- This technical paper present the design of circular patch with slanted rectangular slot (Design 1 and Design 2) and x-circular polarized with slanted rectangular slot (Design 3) by using single port at frequency 2.4GHz. For design 3, the combination of design 1 or design 2 by using quarter wave matching is introduced. The design simulated using Microwave CST software with dielectric constant dielectric constant, $\epsilon_r=4.3$ and $\tan \delta=0.019$ and thickness of substrate, $t=1.6\text{mm}$. The simulation results such as return loss, bandwidth, gain, directivity, axial ratio and polarization have been compared.

1. Introduction

The development of wireless communication system has been rapidly growth in this era with increasing demand in the level of enhancement and performance. The concepts of Multiple Input Multiple Output (MIMO) system have been used since 1980's. They were first investigated by using computer simulation [1] and later many researchers explore about MIMO system [2]. In features, MIMO can be very important technology in wireless systems which is require high data rates such as wireless local area network(WLAN's), broadband wireless access network (WiMaX) and third and fourth generation cellular networks (3G and 4G) [1]. Types of polarizations are linear polarization, circular polarization and x-polarization. To get linear polarization are by using methods of coupled patch, slot and single fed method [3] [4] [5]. Circular polarization can occur when two signals of equal amplitude but have 90degree phase shifted. Method that usually using to get circular polarization are slot, double layer, aperture coupled patch, single feed and double feed method [6] [7] [8] [9] [10]. Dual polarization operation has been important in polarization diversity because can enhance system performance and can combat multipath effect in wireless communication. Design of compact dual polarized microstrip antenna fed by two probe feed has been reported from G.S. Row [11] and design of dual polarization using single port inset feed has been found at [12]. Polarization diversity is combination of antennas with orthogonal polarization either in horizontal or vertical combination, ± 45 degree combination or left or right hand combination [13] [14].

2. Design

The X-circular polarized with slanted rectangular slot design start with basic circular patch design. Then, the slanted rectangular slot has been embedded at the center of the circular patch. After that, 4 element of circular patch with slanted slot is arrange in ± 45 degree alignment and feed with 4 different microstrip transmission line. All the design is simulate by using Microwave CST Studio simulator software. The entire parameters antenna such as return loss, bandwidth, gain, directivity, radiation pattern and surface current were recorded.

2.1 Circular patch with slanted rectangular slot (Design 1 and Design 2)

Next, the rectangular slot which is slanted at -45 degree and $+45$ degree is embedded on the circular patch. Figures 1(a) Design 1 show the circular patch with -45 degree slanted rectangular patch and the position of feed line is at position (5, 5) from origin. Figure 1(b) Design 2 show the circular patch with $+45$ degree of slanted rectangular slot and the coordinate of feed line was at position (-5, 5) from origin. Diameter of patch, d is 16.4mm, length of slot, a is 15.6mm and width of slot, b is 1.2mm.

Feedline that have been used in design is 50Ω and length feedline, L is 43.7mm and width of feedline, w is 3mm.

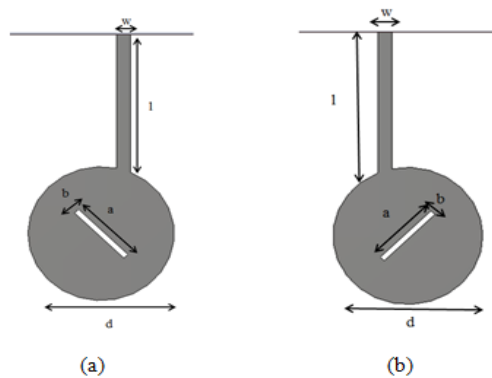


Figure 1 : (a) Circular Patch with -45 Degree Slanted Rectangular Slot (Design 1) (b) Circular Patch with $+45$ Degree Slanted Rectangular Slot (Design 2)

2.2 X-Circular Polarized with Slanted Rectangular Slot (Design 3)

After that, 4 element of circular patch with -45 degree slanted rectangular slot rotated at 45° , 135° , 225° and 315° . All circular patches are connected with 4 different transmission lines. Then, all the transmission line is combine and feed with coaxial probe technique at the center of the antenna. In order to improve the transmission between feed probe and circular patch, the double stage quarter wavelength binomial transformer is implemented. The x-circular polarized microstrip patch which is shown in figure 2 is using one feeding point of 50Ω coaxial probe. Diameter of patch, D is 32mm, length, L and width, d of 50Ω feedline is 43.7mm and 3mm. Length of slot, a is 7.8mm and width of slot, b is 2mm. c is 16mm, length of transmission line, and width of transmission line is e is 2.27mm, f is 1.1mm and g is 1.3mm.

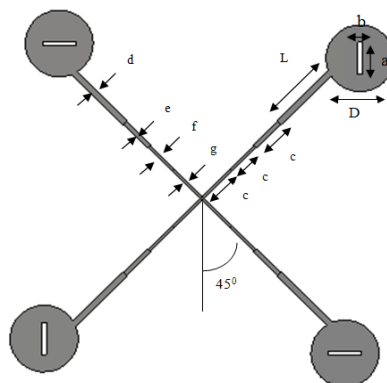


Figure 2: X-Circular Polarized Microstrip Patch Antenna Structure (Design 3)

3. Results

3.1 Circular patch with slanted rectangular slot (Design 1 and Design 2)

a. Return Loss and Bandwidth

Figure 3 show the return loss for design 1 and design 2. Design 2 have a better return loss compare to design 1 which is -25.47dB and -46.63 dB respectively. Bandwidth of design 2 is 40 MHz but for design 1 is 41.1MHz.

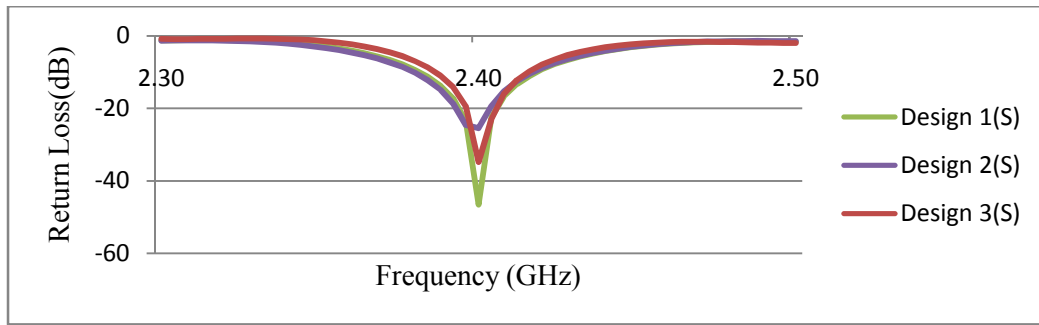


Figure 3: Return Loss for Design 1 and Design 2


b. Gain, Directivity and Total Efficiency

The gain for design 2 is 6.49 dB and the directivity is 7.21dBi which is better compare to design 1. Gain for design 2 is 6.25dB and the directivity is 6.93 dBi. Total efficiency for design 2 is -0.72dB. However, for design 1 has total efficiency of 0.03dB higher compare to the design 1. Surface Current

c. Radiation Pattern

Table 1 represents the radiation pattern for design 1, design 2 and design 3 which is cut at 0 degree and 90 degree and another one is cut at -45 degree and 45 degree for comparison. For design 1, main lobe is 6.3dB at 3 degree and for HPBW is 86.2 degree. For design 2, main lobe is 6.5 dB at 359 degree and HPBW for design 2 is 80.8 degree. Main lobe and HPBW for design 3 is 6.8dB at 25 degree and 29.6 degree respectively.

Table 1: Radiation Pattern

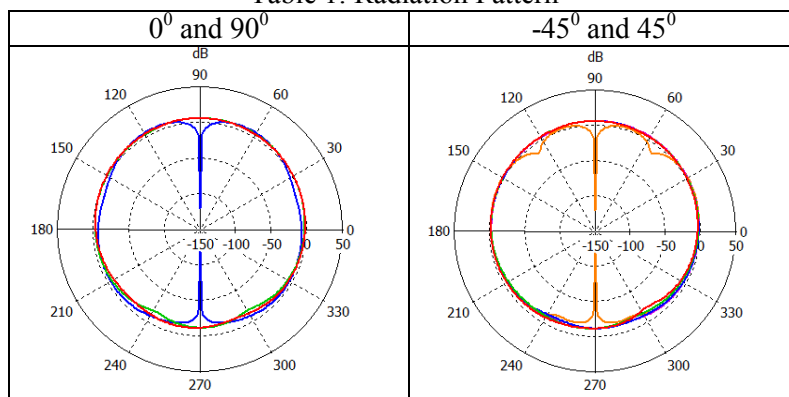

d. Axial Ratio

Figure 6 shows the simulated axial ratio versus frequency. For axial ratio lower than 3 dB, design 1 exhibits a simulated bandwidth of 2.85% or 68.8MHz. For design 2, the simulated bandwidth is 4.04% or 97MHz and for design 3, simulated bandwidth is 8.9% or 214.3MHz.

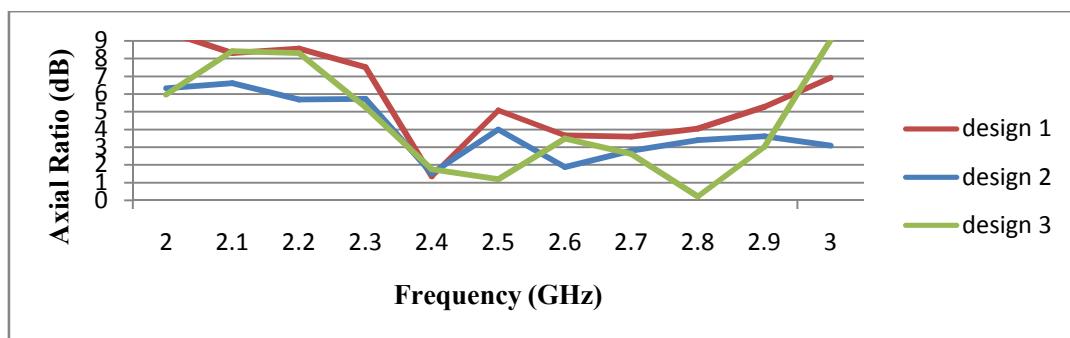


Figure 4: Axial Ratio for Design 1, Design 2 and Design 3

4. Conclusion

The design of basic circular patch, circular patch with ± 45 slanted rectangular slot (design 1 and Design 2) and x-circular polarized with slanted rectangular slot (Design 3) at frequency 2.4GHz have been presented and simulated by using CST software. The x-circular polarized can generate 4 circular radiation with gain and directivity of 6.79dB and 7.54dBi respectively.

References

- [1] D. Gesbert, M. Shafi, D. shan Shiu, P. J. Smith, and A. Naguib, "From theory to practice: an overview of MIMO space-time coded wireless systems," *IEEE J. Selected Areas Comm.*, vol. 21, pp. 281–302, 2003
- [2] J. H. Winters, "On the capacity of radio communications systems with diversity in Rayleigh fading environments," *IEEE J. Selected Areas Comm.*, vol. 5, pp. 871–878, June 1987
- [3] Cui WeiDong, "High gain linear polarization microstrip antenna with four element electromagnetically coupled patch," *Synthetic Aperture Radar, 2009. APSAR 2009*, Pg. 250-253, Oct. 2009.
- [4] Sen Feng ; Nishiyama, E. ; Aikawa, M. "inear polarization switchable slot ring array antenna with SPDT switch circuit" *Microwave Conference, 2009. APMC 2009. Asia Pacific*, Pg. 2794-2797, Dec. 2009.
- [5] Azad, H.M. ; Nishiyama, E. ; Aikawa, M., "Gain enhanced linear polarization switchable microstrip array antenna," *Antennas and Propagation Society International Symposium (APSURSI), 2010 IEEE* , Pg. 1-4, July 2010.
- [6] Andrew R. Weily, Y. Jay Guo, "Circularly polarizaed Ellipse Loaded Circular Slot Array for Milimeter Wave WPAN Application," *IEEE Transaction on antenna and Propagation*, Vol. 57, No. 10, Oct. 2009.
- [7] Choon Sae Lee, Vahakn Nalbandian, Feliz Schwering, "Circularly Polarized Microstrip Antenna with a Single Feed," *IEEE Transaction on Antennas And Propagation*, Vol. 44, No 10, Oct 1996.
- [8] Hveoniin Lee Yeonoseog Lim "Desion of Circular Polarized Microstrin Anerture Coupled Patch Antenna for 5.8GHz ISM Band," *Mircowave Conferencem 2001, APMC 2001*, Vol. 1, Pg. 220-223, Dec 200.
- [9] Cui WeiDong "High gain linear polarization microstrip antenna with four element electromagnetically coupled patch," *Synthetic Aperture Radar, 2009. APSAR 2009*, Pg. 250-253, Oct. 2009.
- [10] Linqiang Hao Jiongqiang Miao Xin Zhao "A Method to Improve the Performance of the Stacked Circularly Polarized Microstrip Antenna," *EMC Technology for Wireless Communication*, Pg. 519-522, Aug. 2007.
- [11] G. S. Row, S. H. Yeh, and K. L. Wong, "Compact dual-polarized microstrip antennas," *Microwave Opt. Technol. Lett.* 27, 284–287, Nov. 20, 2000.
- [12] Shah M S R M · Suaidi M K · Aziz M Z A A · Rose M R C · Kadir M F A · Ia'afar A S · Rahim M K A "Desion of 1x2 1x4 and 2x2 Dual Polarization Microstrip Array Antenna" *Telecommunication Technologies 2008 and 2008 2nd Malaysia Conference on Photonics. NCTT-MCP 2008*, Pg. 113-116, Aug. 2008.
- [13] A. Uz Zaman, L. Manholm and A. Demeryd, "Dual polarized microstrip patch antenna with high port isolation", *Electron.Lett.*, 10,2007, Vol.43, No.10.
- [14] kadir et. al. (2009), "MIMO Beamforming Network Having Polarization Diversity," 3rd European Conference on Antennas and Propagation, (Kadir, M.F.A.; Aziz, M.Z.A.A.; Suaidi, M.K.; Ahmad, M.R.; Daud, Z.; Rahim, M.K.A) Pg. 1743-1747.
- [15] C.A Balanis (2005), *Antenna Theory Analysis and Design* third edition, Wiley, New Jersey
- [16] Compact Meander Type Slot Antenna, *Antennas and Propagation Society International Symposium 2001 IEEE*, Jung-Min Kim;Jong Gwan Yook;Woo-Young.