

Fig. 3. The radiation pattern (xz-plane) for each PIFA element activated at port1 and port 2 (a) PIFA 1 (b) PIFA 2 (c) PIFA 3

As shown in Fig. 1(d) & (e), each HSCA is consisting of 3 PIFA element which are combine together to form a half cubical shape with a slot of 0.1mm between them. The input source which is fed into the HSCAs at port 1 and port 2 respectively is divided into 3 PIFA elements. The branching technique is controlled by the PIN diodes which are acting as ON/OFF switch. The PIN diodes at the branch activated to ON state to allow the input source to be fed into one PIFA element at one time. The shorting strip of each PIFA element is controlled by one PIN diode to avoid multiple grounding while the remaining PIFA element is being fed with input source. Therefore, two PIN diodes are activated to exhibit resonance of a single PIFA element.

3. Simulation Results & Discussion

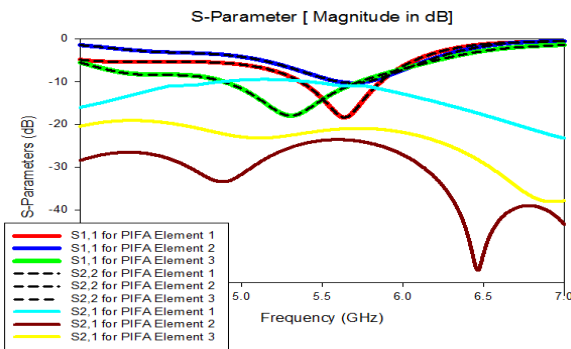


Fig. 2. Simulated scattering parameters for each PIFA element at both HSCA

The antenna was modeled and simulated using CST software. Fig. 2 shows the simulated scattering parameters for the MIMO antenna structure. It is found that all 3 PIFA elements are resonating at 5GHz spectrum with wider bandwidth of 18.16 %, 15.04 % and 40.1% respectively. The PIFA element 1, 2 and 3 at both ports are resonating at the frequency of 5.6GHz, 5.7GHz and 5.3GHz respectively. The radiation pattern of PIFA elements at both ports are shown in Fig. 3. This figure shows that the radiation pattern changes when the PIFA elements at both ports are activated by the PIN diodes. The maximum realized gain for PIFA element 1, 2 and 3 at both ports are 4.32 dB, 7.18 dB and 6.91 dB respectively.

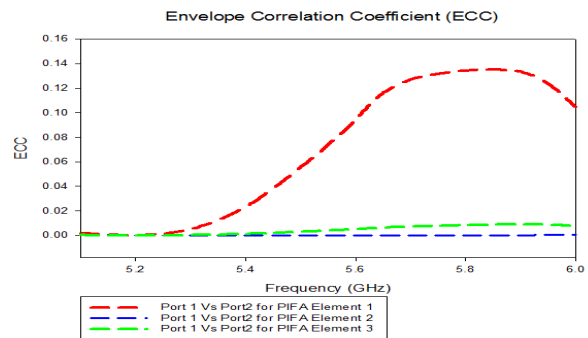


Fig. 4. The simulated ECC results between port 1 & port 2

The Envelope Correlation Coefficient (ECC)s are used to evaluate the correlation between the radiation patterns of the MIMO antenna. Fig. 4 shows that both HSCAs have a very low ECC value that close to 0 which indicates that the antenna elements are almost non-correlated to each other.

4. Conclusion

The proposed MIMO antenna design consists of 2 HSCAs where each HSCA is divided into 3 PIFA element. All the PIFA elements at both HSCA are activated by the PIN diodes to operate at 5GHz spectrum. A wider bandwidth and higher gain is achieved which can be used to accommodate higher data rate. The low ECC between two HSCAs proves that this proposed design is much suitable for MIMO mobile terminal applications.

References

- [1] F. Ahmed, Ying Feng and Ronglin Li, "Dual wide-band four-unit MIMO antenna system for 4G/LTE and WLAN mobile phone applications," *Antennas and Propagation Conference (LAPC), 2013 Loughborough, Loughborough, 2013*, pp. 202-207.
- [2] S. Zhang, K. Zhao, Z. Ying and S. He, "Investigation of Diagonal Antenna-Chassis Mode in Mobile Terminal LTE MIMO Antennas for Bandwidth Enhancement," in *IEEE Antennas and Propagation Magazine*, vol. 57, no. 2, pp. 217-228, April 2015
- [3] Y. Lan *et al.*, "A Field Trial of Unlicensed LTE (U-LTE) in 5.8 GHz Band," *Vehicular Technology Conference (VTC Fall), 2015 IEEE 82nd*, Boston, MA, 2015, pp. 1-5.
- [4] C. G. Christodoulou, Y. Tawk, S. A. Lane and S. R. Erwin, "Reconfigurable Antennas for Wireless and Space Applications," in *Proceedings of the IEEE*, vol. 100, no. 7, pp. 2250-2261, July 2012.