

## Bifurcation Phenomenon from Stick-slip Vibration to Slip Vibration in the Non-autonomous System with Dry Friction

Masahiro Wakai<sup>†</sup>, Hiroki Amano<sup>†</sup>, Yutsuki Ogura<sup>†</sup>, Naohiko Inaba<sup>‡</sup>  
Hiroyuki Asahara\* and Takuji Kousaka<sup>†</sup>

<sup>†</sup> Faculty of Engineering, Oita University,  
700 Dannoharu, Oita-shi, Oita 870-1192, Japan.

<sup>‡</sup> Organization for the strategic Coordination of Research and Intellectual Property, Meiji University,  
1-1-1 Higashi-mita, Kawasaki-shi, Kanagawa 214-8571, Japan.

\* Faculty of Engineering, Okayama University of Science,  
1-1 Ridai-cho, Okayama-shi, Okayama 700-0005, Japan.

Email: {wakai, amano, yutsuki}@bifurcation.jp, naohiko@yomogi.jp,  
asahara@ee.ous.ac.jp, takuji@oita-u.ac.jp

**Abstract**—In the non-autonomous system with dry friction, the bifurcation phenomena are observed upon varying parameters such as the coefficient of friction and the amplitude of the external force. In this paper, we discuss the bifurcation phenomenon from stick-slip vibration to slip vibration in the non-autonomous system with dry friction. First, we explain the physical model of the non-autonomous system with dry friction. Next, we define the Poincaré map by focusing on the local sections and the time. Finally, we investigate the bifurcation phenomenon.

### 1. Introduction

Non-autonomous system with dry friction is often observed in the mechanical fields. The typical examples of the system are seismic isolation systems [1], disk brakes [2], dynamic absorbers [3] and rail wheels [4]. It is known that the bifurcation phenomena are observed in these systems upon varying parameters such as the coefficient of friction and the amplitude of the external force [5]- [9]. Thus, it is important to analyze the bifurcation phenomena in a wide parameter area. However, the systems are difficult to analyze due to their complexity. Therefore, the physical model was proposed to analyze the system in detail [9]. There are many papers that have analyzed bifurcation phenomena occurring in the physical model. Some papers investigated generating region of chaos and periodic pull-in vibration of harmony vibration. We also proposed a simple stability analysis method for this model [10] and analyze bifurcation phenomena in a wide parameter area [11]. However, there are few papers discuss the bifurcation analysis from stick-slip vibration to slip vibration.

In this paper, we analyze the bifurcation phenomenon from stick-slip vibration to slip vibration in the non-autonomous system with dry friction. First, we explain the physical model of the non-autonomous system with dry friction. Next, we show the Poincaré map by focusing on the local sections and the time. Finally, we clarify the bi-

furcation phenomenon.

### 2. System and its behavior

Figure 1 shows the physical model of the non-autonomous system with dry friction, which has single degree of freedom. The following notation is used; mass  $m$ , spring constant  $k$ , displacement of mass  $u(t)$  and velocity  $\dot{u}$ , gravity  $g$ , normal force  $P$ , external force  $F_0 \cos(\omega t)$ , belt speed  $V$ , and relative velocity  $V_r = V - \dot{u}$ . The motion of equation is described as follows:

$$m\ddot{u}(t) - f_0(V) + ku(t) = F_0 \cos(\omega t) \quad (1)$$

During the slip mode ( $V_r \neq 0$ ), the friction force can be determined via the friction coefficient  $\mu(V_r)$ . The friction force is described as follows:

$$f_0(V_r) = \mu(V_r)m\left(g + \frac{P}{m}\right) \quad (2)$$

where  $\mu(V_r)$  is given by

$$\mu(V_r) = \begin{cases} \gamma_0 - \gamma_1 V_r + \gamma_3 V_r^3, & V_r > 0 \\ [-\gamma_0, \gamma_0], & V_r = 0 \\ -\gamma_0 - \gamma_1 V_r + \gamma_3 V_r^3, & V_r < 0 \end{cases} \quad (3)$$

where  $\gamma_0$ ,  $\gamma_1$  and  $\gamma_3$  are decay constants. In particular,  $\gamma_0$  is the maximum static friction force. We use the dimensionless value as follows:

$$\begin{aligned} \omega_n^2 &= \frac{k}{m}, \quad \tau = \omega_n t, \quad x = \frac{u\omega_n}{V}, \quad v = \frac{\omega}{\omega_n}, \\ F &= \frac{F_0\omega_n}{kv}, \quad A_0 = \frac{\gamma_0 c}{(V\omega_n)}, \quad A_1 = \frac{\gamma_1 c}{\omega_n}, \\ A_3 &= \frac{\gamma_3 V^2 c}{\omega_n}, \quad V_r = 1 - y, \quad c = g + \frac{P}{m}. \end{aligned} \quad (4)$$

Thus, Eq. (1) can be described as follows:

$$\begin{cases} \frac{dx}{d\tau} = y \\ \frac{dy}{d\tau} = -x + f_0(y) + F \cos(\nu\tau) \end{cases} \quad (5)$$

where  $f_0(y)$  is given by

$$f_0(y) = \begin{cases} -A_0 + A_1(1-y) - A_3(1-y^3), & y > 1 \\ [-A_0, A_0], & y = 1 \\ A_0 + A_1(1-y) - A_3(1-y^3), & y < 1 \end{cases} \quad (6)$$

Figure 2 shows stick-slip vibration of period-1 orbit. Figure 3 shows example of the waveforms of the displacement  $x$  and the velocity  $y$ . Black dots are the time when the slip mode (kinetic friction force) changes to the stick mode (static friction force). On the other hand, white dots are the time when the stick mode changes to the slip mode. The parameters are fixed as follows:  $A_0 = 1.50$ ,  $A_1 = 1.50$ ,  $A_3 = 0.45$ ,  $F = 0.35$ .

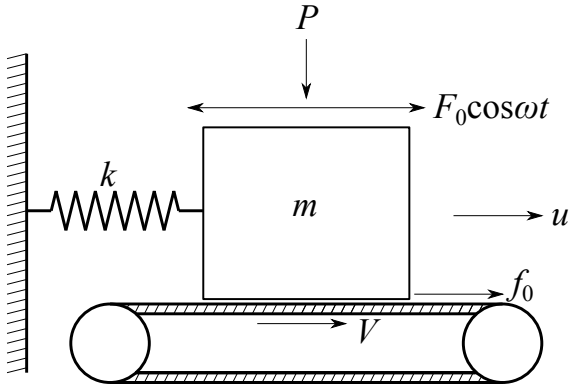


Figure 1: Physical model.

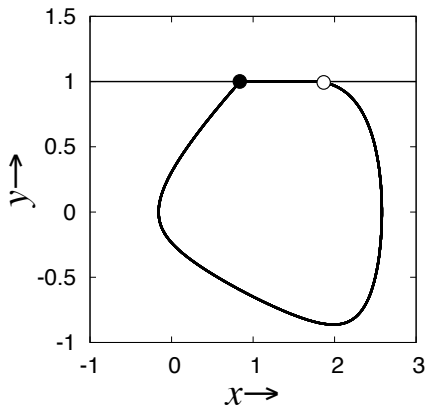


Figure 2: Example of the phase plane.

### 3. Analysis

#### 3.1. Coexistence phenomenon

Figure 4 shows the phase planes for  $\nu=0.44$ ,  $0.45$  and  $0.46$ . Figure 5 shows waveforms. Dotted line in Fig. 4(b) and 5(b) is slip vibration. Stick-slip vibration occurs at  $\nu = 0.44$ . Slip vibration occurs at  $\nu = 0.46$ . Here, we focus on the bifurcation parameter. Stick-slip and slip vibrations occur depending on the initial value at  $\nu = 0.45$ . Namely, coexistence phenomenon exists by changing the initial value.

#### 3.2. Return map

We define the Poincaré map  $T$  from  $\tau_k$  to  $\tau_{k+1}$  for qualitative analysis in the system. Behavior of the system changes from stick mode to slip mode at a time  $\tau = \tau_k$ . Here, the displacement  $x_k$  and velocity  $y_k$  are described as follows at the discrete time  $\tau_k$ .

$$x_k = A_0 + F \cos(\nu\tau_k), \quad (7)$$

$$y_k = 1. \quad (8)$$

$x_k$  is the function of the time  $\tau_k$  and  $y_k$  is constant. Thus, the behavior of the system can be assumed as function of the time  $\tau_k$ . The discretization makes the analysis of the behavior of the system easy. Moreover, we use modulus and function  $\theta_k$  in order to calculate the fixed point [12]. Then,  $\theta_k$  and  $T(\theta_k)$  are given by:

$$\theta_k = \frac{\nu}{2\pi} \tau_k \text{ mod } 1, \quad (9)$$

$$\theta_{k+1} = T(\theta_k) = \frac{\nu}{2\pi} \tau_{k+1} \text{ mod } 1. \quad (10)$$

Figure 6 shows example of the return map of period-1 orbit. More detailed discussion is shown in Ref. [12].

#### 3.3. Bifurcation phenomenon from stick-slip vibration to slip vibration

We focus on the return map in Fig. 7. The mapping point disappears at  $0.88 < \theta_k < 0.92$ . Here, this interval corresponds to slip mode. Therefore mapping point can not be defined.

In the following, we discuss bifurcation phenomenon from stick-slip vibration to slip vibration. When the parameter is  $\nu = 0.455$ , the slope of the return map for period-1 orbit is 1.0. We conclude that the saddle node bifurcation occurs at  $\nu = 0.455$ . After the saddle node bifurcation occurs, the fixed point disappears. As a result, the system settles into slip vibration by disappearing coexistence phenomenon of stick-slip and slip vibrations.

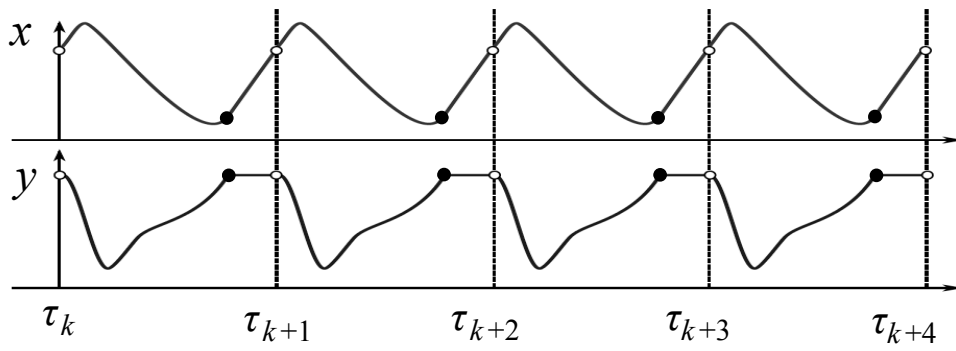


Figure 3: Example of the waveforms.

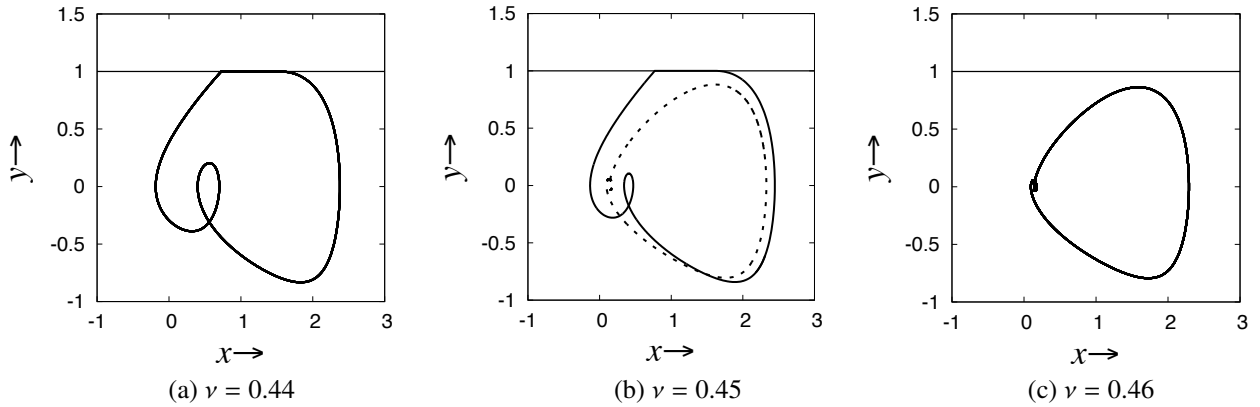


Figure 4: Phase planes.

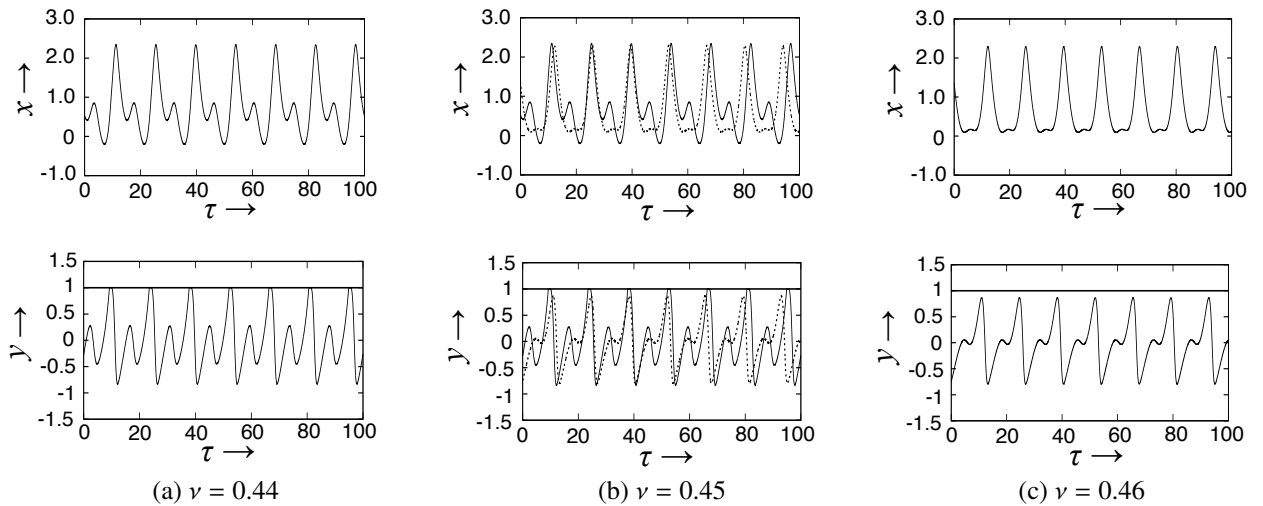


Figure 5: Waveforms.

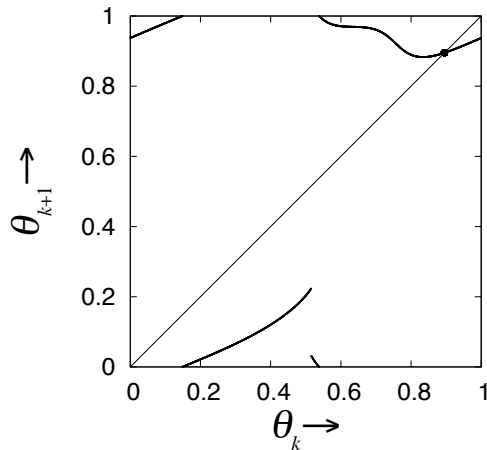


Figure 6: Example of return map ( $\nu = 0.62$ ).

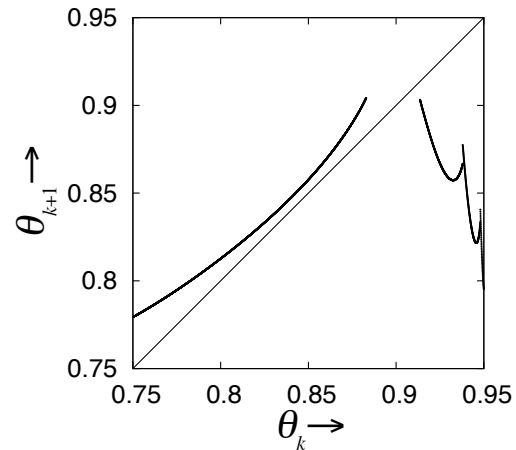


Figure 7: Return map with slip vibration ( $\nu = 0.46$ ).

#### 4. Conclusion

In this paper, we reported the bifurcation phenomenon from stick-slip vibration to slip vibration in the non-autonomous system with dry friction. First, we explained the physical model of the non-autonomous system with dry friction. Next, we defined the Poincaré map by focusing on the local sections and the time. We showed the return map therefore the Poincaré map can be defined as one-dimensional. The mapping point disappears when slip mode is observed. As a result, the saddle node bifurcation caused slip vibration by disappearing coexistence phenomenon of stick-slip and slip vibrations.

#### 5. Acknowledgment

This work was supported by JSPS KAKENHI Grant Number 25330290.

#### References

- [1] Y. Yoshitake, A. Sueoka and H. Tamura, "Analysis of vibrational systems with coulomb's friction (3rd report, quenching of self-excited vibrations)," *Transactions of the Japan Society of Mechanical Engineers, Series C*, vol. 56, no. 523, pp. 568–573, 1990.
- [2] K. Shin, M. J. Brennan, J. -E. Oh and C. J. Harris, "Analysis of disc brake noise using a two-degree of-freedom model," *Journal of Sound and Vibration*, vol. 254, issue 5, pp. 837–848, 2002.
- [3] S. Natsiavas, "Steady state oscillations and stability of non-linear dynamic vibration absorbers," *Journal of Sound and Vibration*, vol. 156, no. 2, pp. 227–245, 1992.
- [4] M. Nakai and S. Akiyama, "Railway wheel squeal (Squeal of disk subjected to periodic excitation)," *J. Vib. Acoust.*, vol. 120, no. 2, pp. 614–622, 1998.
- [5] B. L. Van De Vrande, D. H. Van Campen and A. De Kraker, "An approximate analysis of dry-friction-induced stick-slip vibrations by a smoothing procedure," *Nonlinear Dynamics*, vol. 19, pp. 157–169, 1999.
- [6] R. I. Leine, D. H. Van Campen and W. J. G. Keultjes, "Stick-slip whirl interaction in drillstring dynamics," *IUTAM Symposium on Chaotic Dynamics and Control of Systems and Processes in Mechanics Solid Mechanics and its Applications*, vol. 122, pp. 287–296, 2005.
- [7] U. Galvanetto, "Sliding bifurcations in the dynamics of mechanical systems with dry friction remarks for engineers and applied scientists," *Journal of Sound and Vibration*, vol. 276, issues 1–2, pp. 121–139, 2004.
- [8] P. Kowalczyk and P. T. Piiroinen, "Two-parameter sliding bifurcations of periodic solutions in a dry-friction oscillator," *Physica D*, vol.237, issues 8, pp. 1053–1073, 2008.
- [9] Y. Yoshitake, A. Sueoka, H. Tamura and N. Shoji, "Vibrations of nonlinear systems with discontinuities (Case of forced self-excited vibration accompanied by dry friction)," *Transactions of the Japan Society of Mechanical Engineers, Series C*, vol. 61, no. 583, 1995.
- [10] T. Fujii, H. Asahara and T.Kousaka, "A simple stability analysis method for a period-1 solution in a forced self-excited system with stick-slip vibration," *Journal of Signal Processing*, vol. 18, no. 4, pp. 157–160, 2014.
- [11] T. Fujii, H. Asahara and T.Kousaka, "Qualitative analysis in a forced self-excited system with dry friction," *Proc. of IEEE Workshop on NCN 2014*, pp. 5–6, 2014.
- [12] N. Inaba and S. Mori, "Chaos via torus breakdown in a piecewise-linear forced van der pol oscillator with a diode," *IEEE Transactions on Circuits and Systems*, vol. 38, no. 4, pp. 398–409, 1991.