

the proposed tag is about 10 dB higher than that of the conventional tag by selecting an appropriate antenna length.

Fig. 5 shows the received signal level of the proposed tag with varying the values of the series resistance R_s and the junction capacitance C_0 of the PIN diodes. The value of the junction capacitance does not affect the received signal level significantly, while the value of the series resistance strongly changes the received level, and a small series resistance is desirable to increase the distance between the reader and the tag.

3. Rectifying circuit

For the case of the rectifying circuit of the conventional tag shown in Fig. 1, a high impedance of the tag antenna is desirable to obtain the high DC voltage. However, required power to generate 1 V for the control circuit is more than 0 dBm even when a high impedance antenna such as the folded dipole antenna is used, because a simple diode rectifying circuit is used.

The received power of the microstrip antenna of the proposed tag is estimated to be about -10 dBm at the distance of $z=10$ m assuming that the transmitted power is 300 mW and the gain of the reader antenna is 20 dBi. This power is enough to operate the control circuit of the RFID tag. However, the estimated value of the received DC voltage is as low as 0.1 V assuming 50 Ω load, which is too small to operate the control circuit. Therefore, a rectifying circuit boosting DC voltage more than 10 times and working at 2.45 GHz band is required to obtain the DC voltage higher than 1 V with 30 μ W power consumption.

Fig. 6 shows the proposed rectifying circuit composed of a tank circuit of a $\lambda/4$ short stub and modified 3-stage Cockcroft-Walton circuit. The first diode of the original Cockcroft-Walton circuit [2] is removed. The uniform values of the capacities in the original Cockcroft-Walton circuit are also changed as lower capacitance of the input side capacities. The rectifying diode used in this study is HSMS-286 ($C_0=0.25$ pF). DC output of the proposed rectifying circuit is numerically analyzed by using the SPICE transient simulator. Fig. 7 shows the frequency response of the proposed rectifying circuit when the input RF power is -10 dBm and load resistance is $R_L=33$ k Ω . DC voltage of about 1.15 V is obtained which is considered to be enough to operate the control circuit. The conversion efficiency of the proposed rectifying circuit is about 40%, which is much greater than the conventional Cockcroft-Walton circuit.

4. Conclusion

A novel passive RFID tag for a long reading range composed of a divided microstrip antenna and a rectifying circuit boosting the DC voltage has been proposed. It has been shown that the received level at the reader for the case of the proposed tag is about 10 dB greater than that for the case of the dipole antenna of the conventional tag. Since antenna is a microstrip type antenna having a ground plane, it can be used in the vicinity of a metal structure. The proposed rectifying circuit is composed of a tank circuit of a $\lambda/4$ short stub and modified 3-stage Cockcroft-Walton circuit and can convert from 0.07 Vrms RF voltages of 2.45 GHz to more than 1 V DC voltages which corresponds to the efficiency of about 40%.

References

- [1] "RFID Equipment for Premises Radio Station, RCR STD-1 3rd Ed.", ARIB, Jul. 2003.
- [2] "Cockcroft-Walton Voltage Multipliers", e.g; <http://www.wenzel.com/pdf/volmult.pdf> and <http://deutsche.nature.com/physics/16.pdf>
- [3] Raj Bridgelall, "Bluetooth/802.11 Protocol Adaptation for RFID Tags", Proceedings of European Wireless 2002, Feb. 2002.

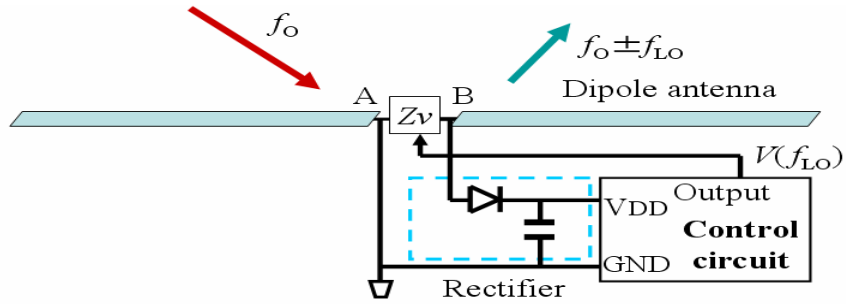


Fig. 1 Structure of conventional passive RFID tag.

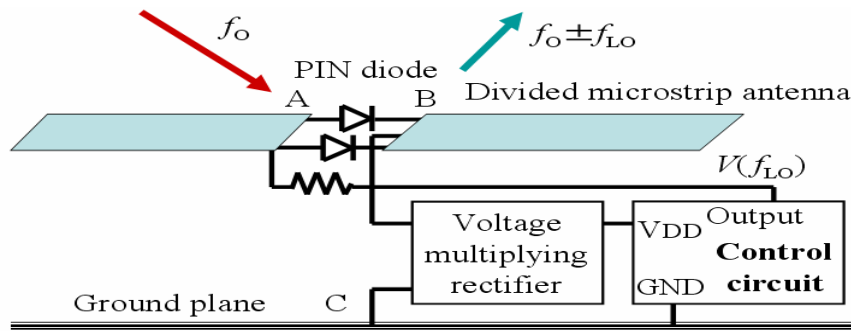


Fig. 2 Structure of proposed passive RFID tag.

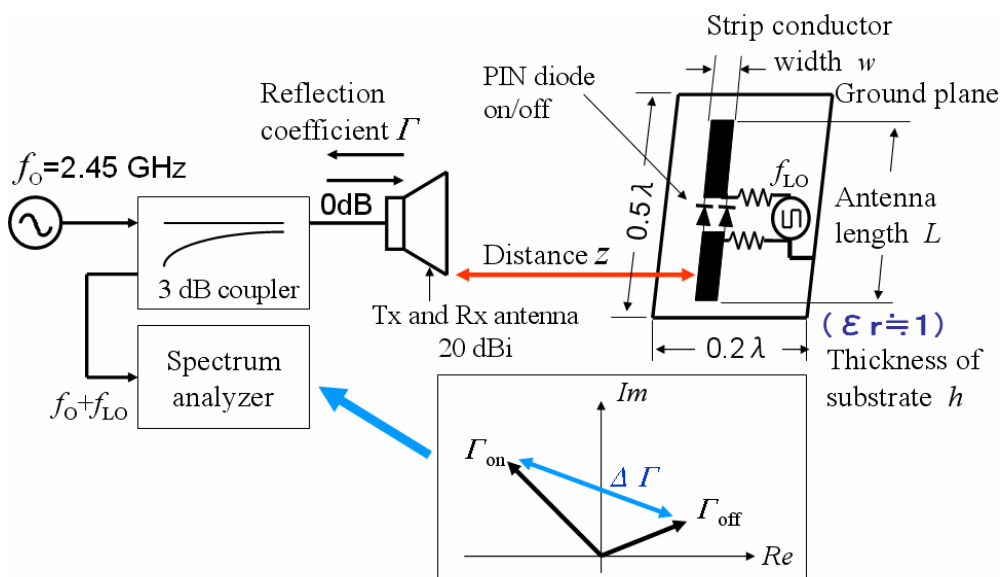


Fig. 3 Schematic diagram for evaluating received signal level at reader.

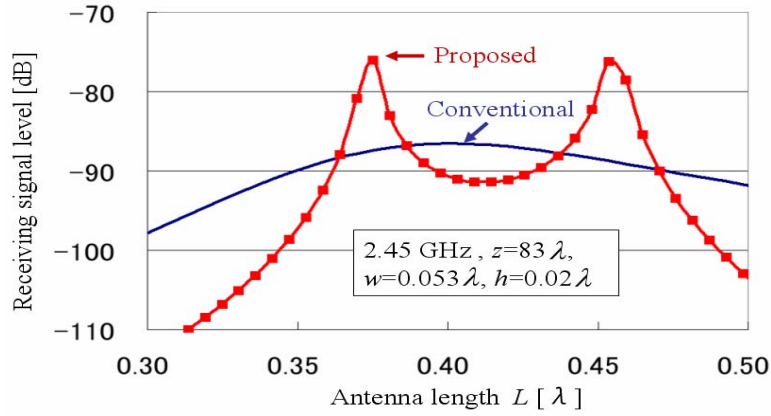


Fig.4 Received signal power normalized by transmitted power of reader antenna as a function of length of the tag antenna L .

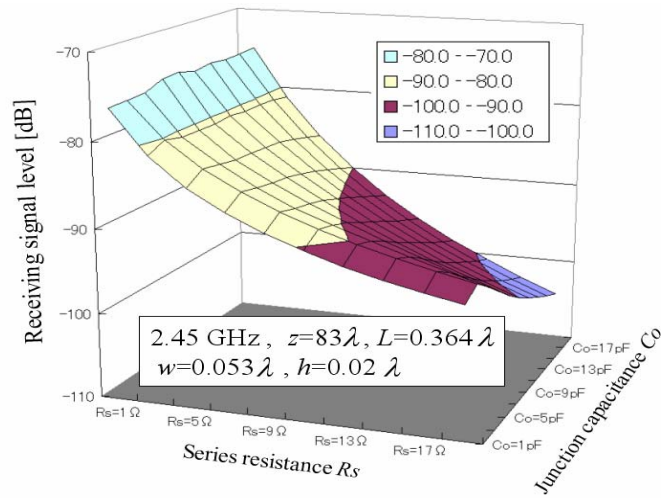


Fig.5 Received signal power normalized by transmitted power of reader antenna versus series resistance and junction capacitance of PIN diode.

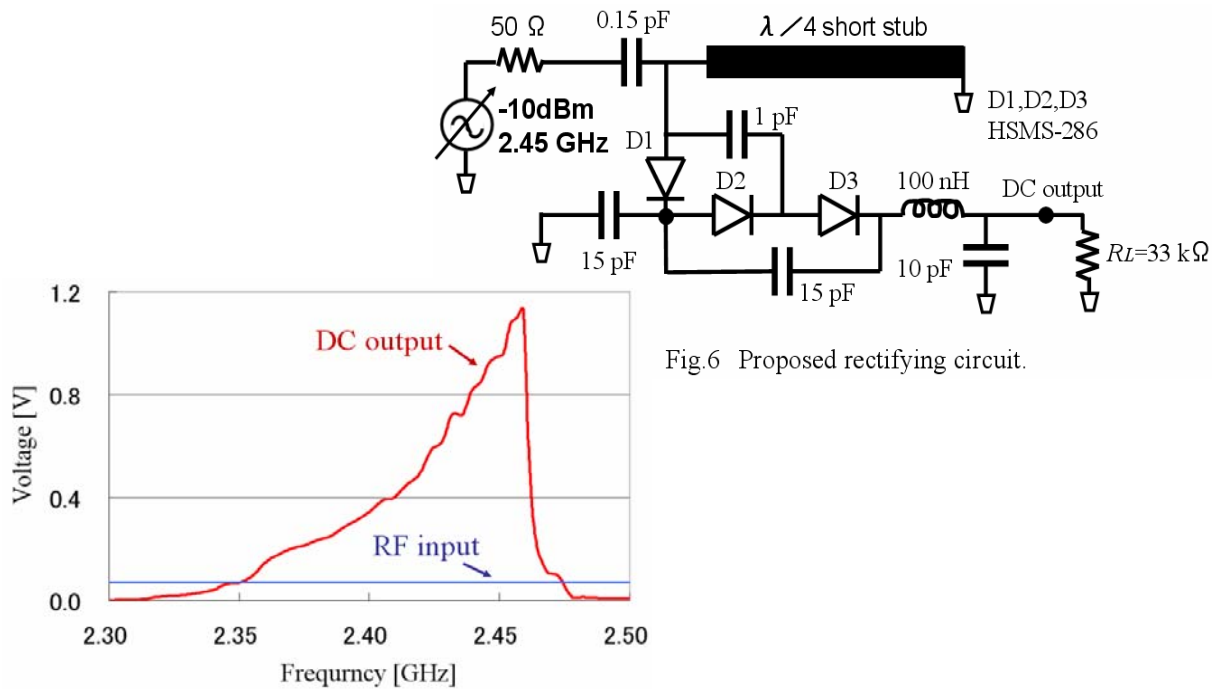


Fig.6 Proposed rectifying circuit.

Fig.7 Frequency response of proposed rectifying circuit.