

## Directional Adaptive WSSG Filter

Won-Seok Choi<sup>1</sup> and Kyung-Sik Jang<sup>2</sup>

<sup>1</sup> Dept. of Electrical and Electronic Engineering, Korea University of Technology and Education  
330-708 Gajeon-Ri 307 Byeong Cheon-Myeon CheonAn-City ChungNam-Province Republic of Korea

<sup>2</sup> Dept. of Electrical and Electronic Engineering, Korea University of Technology and Education  
330-708 Gajeon-Ri 307 Byeong Cheon-Myeon CheonAn-City ChungNam-Province Republic of Korea  
E-mail: <sup>1</sup> dionyou@kut.ac.kr, <sup>2</sup> ksjang@kut.ac.kr

**Abstract:** The image recognition performance depends on the quality of images. In this paper, we propose a method which applies a directional adaptive Weight Separable Symmetrical Gabor filter for vein recognition. The proposed filter is the improved 2D Gabor filter. It has the attributes including separation, symmetry, weight and directional adaptation. In feature of this, our method contributes to the short time and the small cost for image recognition.

**Keyword:** biometric, vein identification, preprocessing

### 1. Introduction

The first step of the image recognition is based on image pre-processing using the filtering. Therefore, it is important for selecting and using filter. Among them, Gabor filter is arguably the best filter.

Though LoG(Laplacian of Gaussian) and DoG(Difference of Gaussian) are useful filter, they are no-direction filter. On the other hand, 2D Gabor filter is a filter for direction. And then, 2D Gabor filter acts as local band-pass filter with certain optimal joint localization properties in both the spatial domain and the spatial frequency domain. (1), [1], [2]. Fig. 1. So 2D Gabor filter is used in many fields.

$$G(x, y, \theta, f) = \exp\left\{\left(\frac{x_\theta^2 + \gamma^2 y_\theta^2}{-2\sigma^2}\right)\right\} \cos(2\pi f_0 x_\theta),$$

$$x_\theta = x \cos \theta + y \sin \theta$$

$$y_\theta = -x \sin \theta + y \cos \theta$$
(1)

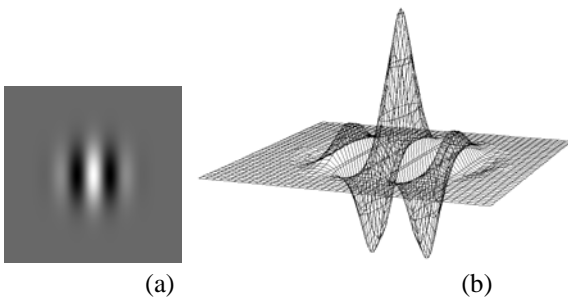


Figure 1. 2D Gabor filter Image (a) wavelet (b) 2D

The scheme which uses a set of 16 Gabor filters is used to capture the ridge strength at equally spaced orientations. So it demands lots of computational time. In order to overcome

this disadvantage, after 2D Gabor filter split into two wavelet of 1D, each 1D wavelet act in sequential convolution. This method is called Separable Gabor Filter. (2), [3], [8]

$$G_{BP}(x, f_0) = \exp\left\{-\frac{1}{2}\left(\frac{x_\theta^2}{\sigma_x^2}\right)\right\} \cos(2\pi f_0 x_\theta)$$

$$G_{LP}(y) = \exp\left\{-\frac{1}{2}\left(\frac{y_\theta^2}{\sigma_y^2}\right)\right\}$$
(2)

The Separable Gabor Filter considerably decreases operation time while it shows significantly consequences like 2D Gabor Filter, and reduces computational complexity. However, it require index operation about pixel in addition which is generated to 1D wavelet rotated for diagonal adapted filter such as 22.5, 45, 67.5, 72.5, 112.5, 135, and 157.5 degree except 0 and 90 degree. This degree was quantitated to each 22.5 degree which is got by dividing 180 degree by 8 for directional filter operation. Furthermore, This is not used suitably in general because the larger image is implemented, the more operation time is required. Specially, as large image, the vein image is not suitable against fingerprint image. In order to overcome the disadvantage, Separable Symmetric Gabor Filter is proposed. This filter pre-prepare rotated 1D wavelet that is made by 2D Gabor rotated filter. This filter is made by each direction implement for convolution.

When 1D wavelet of the Separable Symmetric filter is convolved, it doesn't need to be rotated. This point results in reduced computational complexity and simplified implementation. Moreover, This filter has symmetric feature whose enhancement corresponds to direction about diagonal simultaneously. However, 1D wavelet made by direction filter for diagonal has disadvantage that bandpass feature is weaker than that of Gabor filter. In order to overcome this disadvantage, Weighted Separable Symmetrical Gabor filter is proposed. [4]

Weighted Separable Symmetrical Gabor(WSSG) filter has Symmetrical feature. Thus, 1D wavelet of diagonal direction, such as 22.5, 45, and 67.5 degree expect 0 and 90 degree, has to be added by appropriate value. One more point, the value of 22.5 and 67.5 degree surely different

from the value of 45 degree, because each degree has different rotated degree. The added value effects to complement decreased bandpass feature of Gabor. consequently, the result of this method shows similar with the result of Gabor filter.

## 2. Directional Adaptive WSSG filter

### 2.1 Weighted Separable Symmetrical Gabor filter

We separate all of image into small block, and then filter them. The filter is two 1D wavelet extracted from 2D Gabor. For each direction of pixel, vertical and horizontal 1D wavelet extract from rotated 2D Gabor.

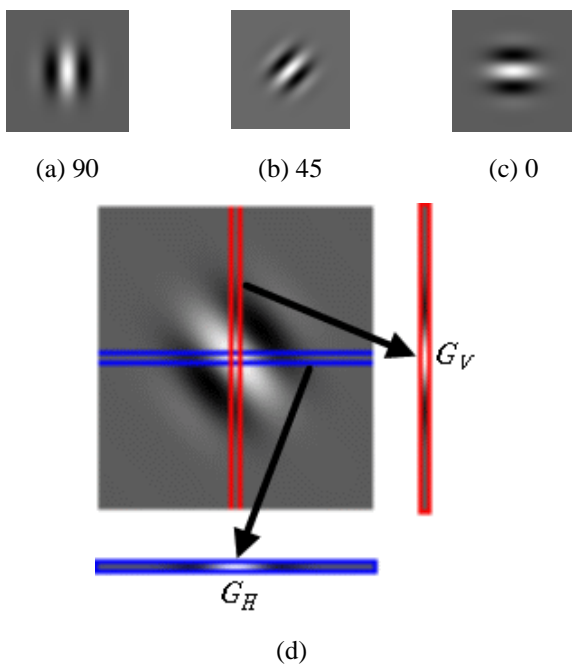


Figure 2. (a), (b), (c) 2D Gabor filter image rotated (d) two 1D filter extracted from 45 degree 2D Gabor filter image.

We convolute each block image with 1D Gabor filter. (3)

$$I_1(x,y) = \sum_{i=-n}^n I_0(x+i,y) \times G_H(n+i) \quad (3)$$

$$I_2(x,y) = \sum_{i=-n}^n I_0(x,y+i) \times G_V(n+i)$$

But, This method has disadvantage that edge feature is weaker than 0 and 90 degree in diagonal filtering. For a directional view for enhancement edge feature, we consider eight direction in block image.

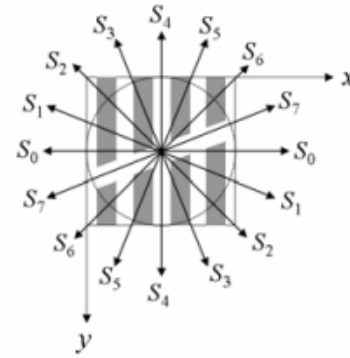


Figure 3. 8 direction divided by each 22.5 degree

2D Gabor filter take weak of its feature as much as image rotated. Because this reason, Gabor filter feature add to 22.5, 45, and 67.5 degree. This is weight separable symmetrical Gabor filter. Fig. 3, [9]

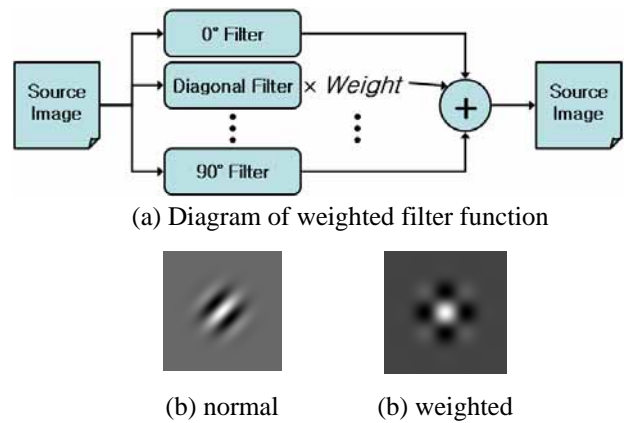


Figure 3. (a) Diagram of weighted filter function  
(b) 45 degree filter of normal 2d Gabor  
(c) weighted 45 degree filter of normal 2d Gabor

### 2.2 Directional Adaptive WSSG filter

Generally, WSSG filter consider all of direction about each block image. It is stand a good chance of optimizing .

For the cost and time make to decrease, we have to work suitable filter on a block. And then, consider information between pixels about a block.

We preprocessed image P by computing an M x N directional image V. We compute the direction at each pixel P(i, j) by sliding the 13 x 13 mask in Fig. 4 over P where c is the center pixel P(i, j). A number of d, e, f, g and h is correspond to 0, 22.5, 45, 67.5 and 90 degree, respectively. [5], [6], [7]



## 4. Conclusion

Well-known steerable filter is generally considered the cornerstone of edge detection in image processing. We introduce a directional adaptive WSSG filter technique using difference of averaged pixels for vein recognition. Our method reduces processing time by removing the need for all directional filtering. Also, the method used is to reduce computational complexity, because it does not need to convolve with other direction wavelet.

Our method performs similar filter that consider all direction. We believe that it can be used as the basis for other image processing.

## 5. Future work

Our method is fast filter function. However, there are a number of parts that remain to be improved for capability. Direction pixel of  $i$ ,  $j$ ,  $k$ ,  $l$ , and  $m$  in Fig. 4 is also able to be considered. To reach a fuller improvement, we need to resarch more closely at image processing.

## References

- [1] J. Daugman. Uncertainty relation for resolution in space, spatial frequency, and orientation optimized by two-dimensional visual cortical filter, *Journal of the optical Society of America*, A,2(7):1160=1169, 1985.
- [2] Hyun-Bo Shim, Young-Base Park, "Fingerprint Recognition using Gabor Filter," *The Kips transaction*, Part B, Vol. B9, Issue 5, pp.653-662, 2002.
- [3] Vutipong Areekul, Ukrit Watchareeruetai, Kittiwat Suppasriwasuseth, Sawasd Tantaratana: Separable Gabor filter realization for fast fingerprint enhancement. *ICIP (3) 2005*: 253-256
- [4] Sang-Woo Sin, Kyung-Sik Jang, "Weighted Separable Symmetrical Gabor Filter for Vein Identification," *the institute of electronics engineers of korea, CICS 2007*, Vol. 30-2.
- [5] D. Maio and D. Maltoni, "Direct gray-scale minutiae detection in fingerprints," *IEEE Trans. Pattern Analysis and Machine Intelligence*, vol. 19, no. 1, pp.27-40, 1997
- [6] M. Ballan, F.A. Sakarya, B.L. Evans, A fingerprint classification technique using directional images, in: *Proceedings of IEEE Asilomar Conference on Signals, Systems, and Computers*, 1997, pp. 101-104.
- [7] J. G. Daugman, "Uncertainty relations for resolution in space, spatial frequency, and orientation optimized by two-dimensional visual cortical filters," *Journal of the Optical Society of America A*, vol. 2, pp. 1160-1169, 1985.
- [8] V. Areekul, "Fast Separable Gabor Filter for Fingerprint Enhancement," *Proceeding International Conference on Biometric Authentication (ICBA2004)*, Springer, pp. 403-409, 2004.
- [9] Woon-Joo Hwang, Sung-Wook Park, Jong-Kwan Park, and Jong-Wook Park "Crease detection method using fingerprint image decomposition and composition", 2007 *The institute of Electronics Engineers of korea*, vol. 44, C3-13